

FORM PTO-1390
(REV 12-29-99)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

BATG-5

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/646811

INTERNATIONAL APPLICATION NO.
PCT/EP99/01768INTERNATIONAL FILING DATE
17 MARCH 1999 (17.03.99)PRIORITY DATE CLAIMED
23 MARCH 1998 (23.03.98)

TITLE OF INVENTION

A DO-IT YOURSELF CIGARETTE MAKER AND COMPONENT ASSEMBLIES

APPLICANT(S) FOR DO/EO/US


TRINKIES, Wolfgang; BURGHART, Kurt

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
PCT Form/IB/308 - Notice Informing the Applicant of the Communication
of the International Application to the Designated Offices;
Return Postcard evidencing receipt of above.

U.S. APPLICATION NO. (if known, see 37 CFR 1.53) 09/640811		INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NUMBER		
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY		
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$		
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE			
Total claims	24 - 20 =	4	X \$18.00	\$	72.00	
Independent claims	5 - 3 =	2	X \$78.00	\$	156.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$		
TOTAL OF ABOVE CALCULATIONS =				\$	1,068.00	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$		
SUBTOTAL =				\$	1,068.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$		
TOTAL NATIONAL FEE =				\$	1,068.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	40.00	
TOTAL FEES ENCLOSED =				\$	1,108.00	
				Amount to be refunded:	\$	
				charged:	\$	
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1,108.00</u> to cover the above fees is enclosed.						
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.						
c. <input type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. _____. A duplicate copy of this sheet is enclosed.						
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.						
SEND ALL CORRESPONDENCE TO: John F. Salazar Middleton & Reutliner 2500 Brown & Williamson Tower Louisville, Kentucky 40202 Reg. No. 39,353						
				 SIGNATURE:		
				John F. Salazar NAME		
				39,353 REGISTRATION NUMBER		

姓名	林炳南
性别	男
出生	1932.12.12
籍贯	福建
民族	汉族
学历	高中
职业	教师
工作单位	福建省教育厅
职务	处长
职称	正高级
政治面貌	中共党员
婚姻状况	已婚
子女	2人
健康状况	良好
特长	书法、摄影
爱好	阅读、旅游
座右铭	天道酬勤
自我评价	为人正直，工作认真，有较强的责任心。
家庭成员	妻子：林某，女儿：林某。
社会关系	无不良社会关系。
其他事项	无。

Assistant Commissioner for Patents
Box PCT
Washington, D.C. 20231

Dear Sir:

IN THE CLAIMS

1





1. (Once Amended) A tube or cigarette conveyor for a do-it-yourself cigarette maker comprising:

- a tube hopper for receiving a supply of empty cigarette tubes,
- a discharge device for a tube, which is to be filled with a tobacco material,
- a holder mechanism within said conveyor [means for holding said tube during the filling operation], and
- a cigarette hopper for receiving [the] filled cigarettes, said discharge device being a lifting device which raises a tube from below out of said tube hopper, wherein, said lifting device comprises a pusher, the top edge of which has a longitudinal recess.

2. The tube or cigarette conveyor as set forth in claim 1, wherein said pusher in said tube hopper is arranged so that said longitudinal recess, in the lowered condition, forms part of the bottom at the lowest point of said tube hopper.

3. (Once Amended) The tube or cigarette conveyor as set forth in claim 1 [or 2], wherein said pusher is arranged at a straight wall of said tube hopper, along which it is raised, deflectors being arranged at the upper part of said wall, which are capable of returning all raised tubes back into said tube hopper, except for the one located in said recess of said pusher.

4. The tube or cigarette conveyor as set forth in claim 3, wherein said deflectors comprise at least one, but preferably two, pivot clips oriented transversely to said



longitudinal recess of said pusher and initially coming to rest on said raised tube upon raising of said pusher, while, upon a further raising, they slide past said tube into slots in said pusher so that they are located underneath said tube and transport said filled cigarette into said cigarette hopper upon lowering of said pusher.

5. The tube or cigarette conveyor as set forth in claim 4, wherein said clips are arranged on a common pivoting axis and are pre-tensioned by means of a lever weight in the direction of rotation so that, upon raising of said tube, their middle sections initially lightly press on said tube, while their front sections deflect further tubes.

6. (Once Amended) The tube or cigarette conveyor as set forth in [any of the claims 1 to 5] claim 1, wherein said [means for holding said tube during said filling procedure] holder mechanism comprises a recessed [surround] forming member which surrounds [the] said tube or cigarette from above at least in part.

7. (Once Amended) The tube or cigarette conveyor as set forth in claim 6, wherein said longitudinal recess of said pusher, in the raised condition, together with said recessed [surround] forming member of said holder [means] mechanism, substantially [completely] surrounds said tube during said filling procedure.

8. (Once Amended) The tube or cigarette as set forth in claim 6 [or 7], wherein said holder [means] mechanism further comprises sensors, in particular a photocell, which detects the presence of a tube or cigarette or the empty condition

of said holder [means] mechanism.

9. (Once Amended) The tube or cigarette conveyor as set forth in [any of the claims 1 to 8] claim 1, wherein said tube hopper and/or said cigarette hopper are configured as drawers, in particular at least the bottom of which is configured latticed, and preferably a removable catchment vessel for the tobacco material is provided below said tube hopper and/or said cigarette hopper.

10. (Once Amended) A tobacco rod shaping [means] mechanism, in particular for a do-it-yourself cigarette maker, comprising:

- a funnel-shaped tobacco material infeed section,
- a singling device for said tobacco material, and
- a tobacco rod compression [means] mechanism, said singling [means] device being a roller, partly surrounded by a housing, with a plucking [means] mechanism arranged at the circumference of said roller, in particular a plucking roller with plucking pins, by means of which said tobacco material is conveyed into said tobacco rod compression [means] mechanism, wherein a wall section is pivot-mounted [so that it can be pivoted out of the way of said roller from a secured working position in order to remove excess tobacco downwards, where it can preferably drop into a removable catchment means].

11. (Once Amended) The tobacco rod shaping mechanism [means] as set forth in claim 10, wherein said funnel-shaped infeed surface comprises at least one wall

section oriented radially to said roller axis.

12. (Once Amended) The tobacco rod shaping mechanism [means] as set forth in claim 10 [or 11], wherein said tobacco rod compression [means] mechanism comprises a tobacco chamber, which can be opened up and closed by at least one side, the travelling side part of said chamber preferably being shifted by means of a cam from the opened position into the closed position, in overcoming a spring preload, and the opening width of the chamber is preferably settable by means of a positioner.

13. (Once Amended) The tobacco rod shaping [means] mechanism as set forth in [any of the claims 10 to 12] claim 10, wherein said wall sections, surrounding said tobacco rod to be shaped, are provided with an anti-stick coating.

14. (Once Amended) The tobacco rod shaping [means] mechanism as set forth in [any of the claims 10 to 13] claim 10, wherein said roller is [inserted] insertably removable.

15. (Once Amended) The tobacco rod shaping [means] mechanism as set forth in [any of the claims 10 to 14] claim 10, wherein said plucking roller is made of a material resistant to corrosion, for example aluminum, preferably with an AlO_2 surface finish.

16. A tobacco rod conveyor for a do-it-yourself cigarette maker comprising a tappet, for shuttling in and out of a chamber containing a tobacco plug, wherein said tappet comprises an outer tube, in which a guide rod runs, said guide rod comprising at its front end an insertion aid for said tobacco rod.

17. The tobacco rod conveyor as set forth in claim 16, wherein said guide rod comprises at its rear end an appendage, by which it can be withdrawn in overcoming the pressure of a spring provided in said outer tube, said insertion aid for said tobacco material thereby entering said outer tube.

18. (Once Amended) The tobacco rod conveyor as set forth in claim 16 [or 17], wherein said insertion aid has substantially the length of said tobacco rod and is shaped so as to assist pushing of said tobacco rod only in the conveying direction, and is configured [, for example,] as a toothed blade, a shingled scoop or spiral guide.

19. (Once Amended) The tobacco rod conveyor as set forth in claim 16 [to 18], wherein said tappet is shifted back and forth at its rear end by means of an eccentric drive, preferably a support engaging with said eccentric drive, in particular a retaining lever, holds said outer tube in position upon removal of said guide rod after conveyance of said tobacco rod.

20. A tube aligning device, especially as provided for a do-it-yourself cigarette maker, comprising a receiving element for said tube consisting of a circular gap

between a housing and a mandrel secured in said housing, wherein said circular gap comprises substantially the axial length of a cigarette tube and at the insertion end a device is provided with which said circular gap can be constricted.

21. (Once Amended) The tube aligning device as set forth in claim 20, wherein said constricting device comprises a clamping screw [,] for screwing to said insertion end [,] as well as collets [,] arranged between mandrel and housing , said gap between said collets and said mandrel being constricted by turning said clamping screw.

22. (Once Amended) The tube aligning device as set forth in claim [19 or 20] 21, wherein, in the region of said collets, an O-ring may be provided around said mandrel, at which preferably an adapter ring is arranged for fixing and centering.

23. (Once Amended) A do-it-yourself cigarette maker comprising: [one or more of the following component assemblies:]

- a tube or cigarette conveyor [as set forth in claims 1 to 9];
- a tobacco rod shaping means [as set forth in claims 10 to 15];
- a tobacco rod conveyor [as set forth in claims 16 to 19];
- a tube aligning device [as set forth in claims 20 to 22].

24. (Once Amended) The do-it-yourself cigarette maker as set forth in claim 23 [or 24, wherein said] having a tappet [of] in said tobacco rod conveyor, [said] a tobacco compression chamber [of] in said tobacco rod shaping means, and [said] a


tube holding [means] mechanism[, for holding said tube during said filling procedure, are] all arranged in [line] sequence, these components being configured so that, upon removal of said tappet, a through hole exists in this [line] sequence.

Please cancel claim 25.

REMARKS

Entry of the above preliminary amendment is respectfully requested.
Claims 1 through 24 remain pending in the present application.

Respectfully submitted,



John F. Salazar, Esq.

Reg No. 39,353


Jsalazar@middreut.com

MIDDLETON REUTLINGER

2500 Brown & Williamson Tower

Louisville, Kentucky 40202

Date: 4 December, 2000



g/p/rt/s

430 Rec'd PCH/PTO

09/646811

22 SEP 2000

A DO-IT-YOURSELF CIGARETTE MAKER **AND COMPONENT ASSEMBLIES**

BACKGROUND OF THE INVENTION

1. Technical Field

The invention relates to a do-it yourself cigarette maker and component assemblies, such as, e.g., a conveying device for cigarettes or tubes fitted with a lifting device, a device for shaping a tobacco rod fitted with a plucking roller, a tobacco rod conveyor fitted with a spring tappet, and a tube-aligning device with a narrowable slit for introducing the tube.

Do-it-yourself cigarette makers are known, for example, as small manual fillers, in which a plug of tobacco is inserted into an externally mounted tube by means of a pusher. Such small devices require a relatively high manual input, and thus a relatively long production time when several cigarettes need to be made. In addition, the quality of the cigarettes made greatly depends on the manual skill of the producer, with the result that rejects are produced quite often.

2. Description of Related Art

To get round these problems, automated cigarette fillers have been proposed, as are known for example from DE 33 43 500 C2, and which automate do-it-yourself production as far as possible. Such automated cigarette fillers are known from DE 33 47 966 C2, DE 33 47 967 C2, DE 33 47 968 C2 as well as from DE 32 47 370 A1 and EP 0 144 060 B1.

As regards metering the tobacco, the above-cited prior art in each case uses a funnel, below which a size-reduction or conveying means is arranged. These size-reduction or conveying means comprise, for example, singled or paired knife or pin shafts which, disadvantageously, heavily load and shred the long-fiber filling tobacco. Known from DE 425 478 is a cigarette

filler comprising several spike-toothed rollers, the first of which is arranged directly below a totally enclosed funnel mount.

As regards tube feeding, the cited prior art regularly proposes either allowing the tubes to drop
5 from an inclined plane into a receptacle, from which they are then transported axially to a receiving cone, or to use a picker to take the tubes out of a tube hopper, which is swiveled to thereby pass on the empty tube. Since empty tubes are easily deformed and cannot always be arranged singly in parallel in a tube hopper arranged inclined, disadvantageously, in both of the tube conveyors cited in prior art, it cannot always be assured that only a non-deformed tube is
10 passed on. Singling the tubes in the non-deformed condition, and thus a frictionless operation, can thus not be assured since even the slightest disorientation or jamming resulting from tube deformation will result in the empty tube section being trapped, and forced downtime occurring. In addition, the tubes must always be conveyed axially in order to be placed with their open face ends on a conical means. This may result in damage to the tube. DE 241 698 proposes to swivel
15 the hopper bottom, hinged on one side upwards, in order to lift a cigarette tube from a tube hopper; this requiring particularly complicated means to be arranged for singling the tubes.

In order to insert a pre-shaped tobacco rod into an empty tube, tappets in accordance with the prior art are used which, as proposed, for example, in EP 0 144 060, comprise at their front end
20 an insertion aid (shingled scoop). Disadvantageously, the scoop in accordance with the cited European patent is arranged rigidly at the front end of the tappet, with the result that it obstructs the expansion of the tobacco as long as it is located in the tube together with the tobacco rod. When operating entirely without any insertion aid, it is difficult to insert a tobacco rod with axial homogenous packing density into the tube, since a relatively random compression materializes
25 lengthwise during this operation. Known from German laid-open patent publication 22 09 862 is a manual cigarette filler comprising a pusher and a plunger, which pushes a plug of tobacco and a filter in a predetermined sequence.

German patent 93 17 497 U1 describes a do-it-yourself cigarette maker, comprising a bore with a co-axially arranged guide rod for receiving a cigarette tube.

SUMMARY OF THE INVENTION

It is an object of the present invention to improve a do-it-yourself cigarette maker or the component assemblies thereof so that the above-cited disadvantages of the prior art are obviated as far as possible.

In this connection, at least part of the object of the present invention is to provide a tube or cigarette conveyor for such a do-it-yourself cigarette maker, which reliably singles the tubes and supplies them, as non-deformed as possible, to the filling procedure.

Another object of the present invention is to provide a tobacco rod shaping device which permits gentle treatment of the long-fiber filling tobacco.

It is furthermore an object of the present invention to provide a tobacco rod conveyor for a do-it-yourself cigarette maker which does not obstruct expansion of the tobacco in the cigarette tube after insertion and ensures that cigarettes materialize with a homogenous package density.

The invention is furthermore intended to provide a tube-aligning device or straightener with which deformed cigarette tubes can be simply and reliably restored into a condition suitable for further processing.

Finally, the present invention is further intended to provide a do-it-yourself cigarette maker which overcomes the cited disadvantages of the prior art.



The cited objects of the present invention are achieved by the subject matters of the independent claims, the sub-claims describe advantageous embodiments of the invention.

5 A tube or cigarette conveyor for a do-it-yourself cigarette maker in accordance with the invention comprises the following elements:

- a tube hopper for receiving a supply of empty cigarette tubes,
- a discharge device for a tube to be filled with a tobacco material,
- a holder mechanism for holding the tube during the filling operation, and
- a cigarette hopper for receiving the filled cigarettes.

10 In this arrangement, the discharge device in accordance with the present invention is a lifting device which raises a tube from below out of the tube hopper, the lifting device comprising a pusher, the top edge of which has a longitudinal recess [a lower forming member or lower format].

15 The advantage of this tube or cigarette conveyor is, more particularly, that by lifting the tube from a hopper in which the tubes are normally located loosely stacked, no strain materializes which could result in deformations obstructing production. The other tubes, located above the tube being lifted out from the tube hopper, simply slide down from the tube to be lifted out and
20 are unable to create any permanent deformations due to their own light weight.

The pusher in the tube hopper is preferably arranged so that the longitudinal recess in the lowered condition forms part of the bottom at the lowest point of the tube hopper. In this point of the tube hopper, usually only one cigarette tube is located for "dropping into" the longitudinal
25 recess in the lowered condition. The longitudinal recess surrounds the tube from underneath without exerting any deforming forces. This ensures that, when the pusher is raised, the tube comes upwards without being damaged, and more particularly that only one tube is arranged in the longitudinal recess. In particular, when relatively few tubes are located in the tube hopper,



this arrangement ensures that, subsequent to raising of the tube, this as the sole non-distorted tube, is transported to and held positively at the position where it is to be filled with tobacco.

5 Preferably, the pusher can be arranged at a straight wall of the tube hopper, along which it is raised, deflectors being arranged at the upper part of the wall which are capable of returning all raised tubes back into the tube hopper with the exception of the one located in the recess of the pusher.

10 The advantage of this embodiment is particularly evident when a large number of tubes are present in the tube hopper. When the pusher is raised, the straight wall of the tube hopper forms a stable support for the tube located on the longitudinal recess. Any other tubes which may be located thereon are deflected when the upper edge of the pusher is run into the upper portion of the wall. This ensures that even when the tube hopper is full, tube singling is still easily possible.

15 The deflectors may comprise at least one, but preferably two, pivot clips oriented transversely to the longitudinal recess of the pusher and, when the pusher is raised, initially come to rest on the raised tube, while, upon further raising, they slide past the tube into slots in the pusher so that they are located underneath the tube and transport the filled cigarette into the cigarette hopper upon lowering of the pusher. In such a way, the deflectors can be simultaneously used as a
20 mechanism for further conveying the filled cigarette by lifting it from the longitudinal recess when the pusher is lowered so that the cigarette automatically drops into the cigarette hopper.

25 In an embodiment described above, the clips are preferably arranged on a common pivoting axis and are pre-tensioned in the direction of rotation by means of a lever weight so that, upon raising of the tube, their middle sections initially lightly press on the tube, while their front sections deflect further tubes. Advantageously, one of the clips comes to lie on the filter of a filter tube, where the force produced by the lever weight permits no deformation of the cigarette. Due to the

connection of both clips on a single pivoting axis, the other clip will also not deform the empty cigarette paper of the tube in this condition.

In an embodiment of the tube or cigarette conveyor in accordance with the invention, the means for holding the tube during the filling procedure comprises a recessed surrounding section or upper forming member, also termed upper format, which at least partly surrounds the tube or cigarette from above. The longitudinal recess of the pusher [lower forming member], in the raised condition, together with the recessed upper forming member of the holder means may substantially completely surround the tube during the filling procedure.

In accordance with the invention, after raising of the pusher, the cigarette tube is held in place by an external surrounding member during the filling procedure, i.e., it is no longer necessary to raise the tube axially to a conical nozzle by means of a shifting mechanism, as is done in the prior art. Advantageously, this removes the axial movement requirement and, in addition, the risk of the tube being deformed by such a movement can be eliminated. Due to the surrounding hold in the holder mechanism, already deformed tubes may be gently restored to their circular shape.

In another preferred embodiment, the holder mechanism comprises sensors, more particularly a photocell, which detects the presence of a tube or cigarette or the empty condition of the holder mechanism. This thus provides a control mechanism which ensures that no further tube is introduced into the holder until the produced cigarette has been ejected.

In a further embodiment of the tube or cigarette conveyor in accordance with the invention, the tube hopper and/or the cigarette hopper are configured as drawers, in particular the bottom of which is configured latticed. Since the dropping of tobacco remnants into the tube hopper or cigarette hopper cannot always be avoided, these are best maintained free of such tobacco remnants by arranging for the remnants to simply drop through the bottom. This is possible when

the bottom is configured latticed, for example as a wire lattice. When a removable catchment vessel is provided below the tube hopper and/or cigarette hopper, the tobacco falling through can be easily eliminated.

- 5 Configuring the tube or cigarette hopper as a drawer facilitates inserting the tubes and removing the cigarettes.

A tobacco rod shaping mechanism in accordance with the invention, which can be provided in particular for a do-it-yourself cigarette maker, comprises the following components:

- 10 - a funnel-shaped tobacco material infeed section
- a singling device for the tobacco material, and
- a tobacco rod compression mechanism.

15 The singling device, in this arrangement, is a roller, partly surrounded by a housing, with a plucking mechanism arranged at the circumference of the roller. In particular, a plucking roller with plucking pins, is used to convey the tobacco material into the tobacco rod compression mechanism. Formed between the housing and the roller is a gap through which the tobacco, plucked from the funnel-shaped section, is introduced into the compression mechanism. Advantageously, this plucking action ensures gentle treatment of the tobacco, i.e. the long-fiber
20 filling tobacco is not excessively pulled to pieces and reduced in size as in prior art (knife rollers). This has a positive effect on the filling capacity of the tobacco.

25 In accordance with the invention, the funnel-shaped infeed section comprises at least one wall section oriented radially to the roller axis, more particularly one wall section being pivot-mounted so that it can be pivoted out of the way of the roller from a secured working position. At the wall section radially joined to the roller, the tobacco can be well plucked out in the funnel-shaped infeed section. When a wall section can be pivoted out of the way, excess tobacco materializing, for example after a number of cigarettes have been produced, can be removed

directly from underneath the roller, it preferably being allowed to drop into a removable catchment means.

In accordance with an advantageous embodiment, the tobacco rod compression mechanism comprises a tobacco chamber, which can be opened up and closed from at least one side, the travelling side part of the chamber preferably being shifted by means of a cam from the opened into the closed position against a spring preload, and the opening width of the chamber is preferably settable by means of a positioner.

The wall sections, surrounding the tobacco rod to be shaped, are advantageously provided in accordance with the invention with an anti-stick coating facilitating the ejection of the tobacco from the tobacco chamber.

The roller may be inserted removable, it preferably furthermore being made of a material resistant to corrosion, for example aluminum, with an AlO_2 surface finish.

The tobacco rod conveyor for a do-it-yourself cigarette maker in accordance with the invention comprises a tappet, which can be drawn in and out of a chamber containing a tobacco rod. The tappet has an outer tube in which, in turn, a guide rod may run, the guide rod comprising at its front end an insertion aid for the tobacco material. This configuration has the advantage that the insertion aid at the guide rod can be retracted into the tubular tappet while the tobacco is already in the cigarette tube, the outer tube, at the same time, still being in contact with the tip of the cigarette. In this condition, the tobacco, which is compressed in the tobacco compression chamber to a diameter somewhat smaller than the inner diameter of the cigarette tube, is able to implement an expansion action, which is not obstructed by the insertion aid. The open tip of the cigarette is closed off by the face end of the outer tube to achieve a homogenous distribution of the tobacco in the cigarette which is then compacted on all sides substantially to the same degree. As the insertion aid is retracted from the outer tube in contact with the tube at the tobacco end,



remnants of tobacco are also prevented from being removed from the cigarette upon extension of the insertion aid.

In an embodiment of one such tobacco rod conveyor, the guide rod may comprise an appendage at its rear end by which it can be withdrawn from the outer tube in overcoming the pressure of a spring provided at the outer tube, the insertion aid for the tobacco material thereby entering the outer tube. When, in such a configuration, the guide rod is retracted after the cigarette tube has been filled, the outer tube, when suitably blocked, initially remains in contact with the front end of the cigarette. To then also remove the outer tube from the cigarette, all that needs to be done is to release the blocking action so that the outer tube snaps back, i.e. there is no need to move the cigarette tube or the filled cigarette during the filling procedure and until after its completion.

An insertion aid used in accordance with the invention has substantially the length of the tobacco rod and is shaped so as to assist pushing of the tobacco rod only in the conveying direction. It may be configured, for example, as a blade, toothed in one direction, or as a shingled scoop.

As regards blocking the outer tube to advantage in the position at the open end of the cigarette, which has been already mentioned, one advantageous configuration consists of the tappet being shifted back and forth at its rear end by means of an eccentric drive, preferably, a support engaging with the eccentric drive, in particular a retaining lever, holding the outer tube in position upon removal of the guide rod after conveyance of the tobacco rod.

The tube-aligning device or straightener in accordance with the invention, which in particular may be provided in a do-it-yourself cigarette maker, comprises a receiving element for the tube, which consists of a circular gap between a housing and a mandrel secured in the housing. The circular gap comprises substantially the axial length of a cigarette tube and at the insertion end a device is provided with which the circular gap can be constricted. By constricting the circular gap subsequent to insertion of a deformed cigarette tube, a smoothing effect is achieved when

this tube is pulled out again, meaning that cigarette tubes, thus treated, are directly suitable for reuse in cigarette making. Advantageously, straightening the tubes in this way can be implemented by very few handholds.

5 In a preferred embodiment of the tube-aligning device, the constricting device comprises a clamping screw, for screwing to the insertion end, as well as collets, arranged between mandrel and housing, the gap between the collets and the mandrel being constricted by turning the clamping screw.

10 In the region of the collets, an O-ring may be provided around the mandrel, at which preferably also an adapter ring is located for fixing. In an arrangement such as this, infeeding the tubes into the tube-aligning device is facilitated by centering the O-ring by means of the adapter ring.

15 Furthermore, a do-it-yourself cigarette maker in accordance with the invention comprises one or more of the component assemblies described above, namely a tube or cigarette conveyor, a tobacco rod forming means, a tobacco rod conveyor and a tube-aligning device, thus achieving the above-described advantages linked with each of these component assemblies.

20 Furthermore, the do-it-yourself cigarette maker may comprise motors, in particular electric motors for the components to be driven, as well as a preferably electronic sequence control which, with the aid of sensors, monitors and regulates the operating condition in each case and in particular provides an external indication thereof by display means.

25 The tappet of the tobacco conveyor, the tobacco compression chamber, the tobacco rod shaping means and the tube holding means, for holding the tube during the filling procedure, are all arranged in line in a do-it-yourself cigarette maker in accordance with the invention, these components being configured so that, upon removal of the tappet, a through hole exists in this

line. Such a through hole facilitates cleaning the apparatus in the region of the tobacco chamber; for this purpose, an elongated brush or a device similar to a pipe cleaner can be pushed through.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be explained in detail by way of a preferred embodiment of a do-it-yourself cigarette maker with reference to the drawings in which:

- Fig. 1** is an outer view in perspective of a do-it-yourself cigarette maker in accordance with the invention;
- Fig. 2** is an exploded view in perspective of the three main component assemblies of the do-it-yourself cigarette maker, namely a tube or cigarette conveyor, a tobacco rod shaping device and a tobacco rod conveyor;
- Fig. 3** is a schematic cross-section through a tobacco rod shaping device;
- Figs. 4A to 4D:** are schematic illustrations of the sequence in action of a do-it-yourself cigarette maker in accordance with the invention;
- Fig. 5** is a longitudinal section through a tobacco rod conveyor in accordance with the invention, showing the components adjoining in the conveyor line of the tobacco rod;
- Figs. 6A to 6E:** illustrate the operating conditions of the tube or cigarette conveyor during production of a cigarette;
- Fig. 7** is a magnified representation of a detail taken from Fig. 6E to make the individual components evident; and
- Fig. 8** is an illustration of a tube-aligning device in accordance with the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the perspective outer view of Fig. 1, the do-it-yourself cigarette maker in accordance with the invention can be seen as a whole, including the housing or casing sections 10, 20 and 30.

Accommodated in the housing section 10 is the tobacco rod conveyor, two components of which, namely the wheel 120 and the lever 110 of the eccentric drive, being visible through a window. Furthermore, provided at the housing is a pushbutton 60 for starting the apparatus as well as display means 50 indicating the corresponding operating condition, namely plucking of the tobacco, compression of the tobacco rod and insertion of the tobacco rod into the tube.

Provided in the middle is the housing 20, accommodating the tobacco rod shaping device which will be described in detail later on. Provided below the window, also arranged in the housing 20, is a removable catchment receptacle for tobacco remnants, which can be slid out frontwards at its panel 22. With the aid of the lever 62, the front wall section 214 can be hinged forward out of the way and the plucking roller 220, to be described later, rotates to empty the tobacco hopper 210. Using the bayonet lock 61, which will also be described later, the plucking roller can be removed. Located on the right side of the housing 20 is the tube or cigarette conveying section 30, which comprises a tube hopper 310, a pusher 340, an upper format 320 and a cigarette hopper 330.

Like the housing 20, the tube or cigarette conveyor comprises a bottom catchment receptacle for tobacco material which can be pulled out to the front with the aid of the panel 22. The tube hopper 310 is configured as a drawer and can be removed from the side wall 34. Likewise, the cigarette hopper 330 is also configured as a drawer, which, again, can be removed from the side wall 36.

Illustrated in Fig. 2 in an exploded view in perspective are the individual functional component assemblies of the do-it-yourself cigarette maker in accordance with the embodiment shown. Represented on the left side is the tobacco rod conveyor 100, which is configured as an axially shifting tappet. Evident from the tappet in Fig. 2 is the outer tube 130 as well as the toothed blade 150 serving as an insertion aid for the tobacco rod. The tappet is moved back and forth in axial direction by means of an eccentric drive comprising the eccentric cam 120 and the lever 110. Also provided is a retaining lever 160 with a front latching protuberance 162 and a rear lever projection 164 capable of riding on edge 112.

Shown in the center of Fig. 2 is the tobacco rod shaping means 200 consisting of a tobacco filling funnel 210, including the opposing upper funnel wall parts 212 and the radially arranged lower front wall parts 214 and 216. The front wall part 214 is shown separately and may be tilted away in the direction of the arrows in order to clean tobacco downwards out of the funnel 210. Arranged below the funnel 210 is the housing 240 in which a plucking roller 220, comprising plucking pins 222, is rotatively mounted. Located between the circumferential wall of the roller 220 and the housing 240 is a gap 230, through which the tobacco, plucked from the funnel 210, is conveyed downwards. Below the roller is a tobacco chamber 270, into which the tobacco drops, as described above. The side wall of the tobacco chamber, shown at the front in Fig. 2, is formed by a compressive pusher 250 which can be traveled in the lower housing part towards and away from the longitudinal centerline of the tobacco chamber 270, i.e. by means of a cam 260. When the compressive pusher 250 is traveled fully up to the longitudinal centerline of the tobacco chamber 270, a tobacco rod is compressed from the tobacco introduced into the tobacco chamber 270 by the plucking roller 220. In Fig. 3, such a compressed tobacco rod 70 is illustrated in the cross-sectional illustration of the tobacco rod shaping device, after it has been shaped by means of the compressive pusher 250. It is to be noted that Fig. 3 merely serves to show the shape and location of the compressed tobacco rod 70. The cam 260 is merely illustrated schematically and turned 90° for a better representation, whereas, in a real sequence of the filling procedure, the pusher 250 would remain in position at the tobacco rod 70 until it is pushed out.

Finally, illustrated in Fig. 2 on the right is the tube or cigarette conveyor 300, still in the uncased condition. Its main components are the tube hopper 310, the tube pusher 340, including the lower forming member or lower format 342, configured as a longitudinal recess on the upper side of the pusher 340, the upper forming member or upper format 320 as well as the cigarette hopper 330.

The electric motors, needed to power the respective components and the operating control, are not shown. They may be achieved, however, by measures known from prior art. For example, the upper format 320 comprises a photocell at its rear end, which detects whether a cigarette tube or a filled cigarette exists in the upper format or forming member, the electronic control then ensuring that a new filling sequence only starts when the upper format 320 is empty again.

Before going into further details, the general sequence of events involved in making the cigarettes using the do-it-yourself cigarette maker will now be described.

Firstly, long-fiber filling tobacco is introduced into the funnel 210 and empty filter tubes, as shown in Fig. 2, are inserted into the tube hopper 310 with the open end pointing in the direction of the tobacco rod shaping mechanism 200. After the apparatus has been started, for example by means of the pushbutton 60 (see Fig. 1), an empty cigarette tube is raised from the tube hopper 310 by means of the pusher 340 so that it is held captive between the lower format 342 and the upper format 320 to "shape up" the tube, i.e. to eliminate possible deformations so that the tube has substantially a completely round cross-section.

Once the tube has been firmly positioned at the upper format, the plucking roller 220 is rotated, i.e. by roughly one rotation in the conveying direction and then returned by a quarter rotation to remove any pile-up of the tobacco at the gap opening of the lower funnel wall 216. This results in tobacco being plucked from the funnel 210 and introduced into the tobacco chamber 270, the

tobacco thereby being treated gently, so that it remains long-fibered. This conveying procedure is implemented as often as is needed to sufficiently fill the tobacco chamber 270, it automatically being ensured that substantially the same amount of tobacco is present everywhere in the longitudinal direction of the tobacco chamber 270 since any excess tobacco at the initially or first
5 filled portion of the chamber 270 may be conveyed upwards again via the plucking roller. Alternatively, locations initially having less tobacco are refilled with tobacco in the course of the rotations of the roller 220. The number of rotations needed can be preset.

10 Once sufficient tobacco is present in the tobacco chamber 270, the compressive pusher 250 is pressed together via the cam 260 in the direction of the longitudinal centerline to thus produce a compressed plug of tobacco, the diameter of which is somewhat smaller than the inner diameter of the tube.

15 In the aforementioned compression procedure and when introducing the tobacco into the tobacco chamber 270, the toothed blade 150 is located in the tobacco chamber. After the latter has been run together, the compressive pusher 250 remains in its advanced condition for a certain length of time.

20 After the aforementioned residence period has elapsed, the tobacco is inserted axially forwards into the cigarette tube with the aid of the tobacco rod conveyor 100 this procedure being described in more detail later on.

25 Once the tobacco plug has been inserted into the tube, the toothed blade 150 still remains for a certain length of time in the cigarette so that the tobacco can expand and a sufficient friction develops at the inner surface of the tube before the tobacco conveyor is retracted.

After the above procedure has been effectuated, the pusher 340 is returned downwards and the finished cigarette is conveyed into the cigarette hopper 330 by means of deflector, which will

likewise be described later. This concludes production of the cigarette and production of the next cigarette can commence. Each of the procedures cited above takes place sequentially, one after the other. Either the tube or cigarette conveyor, the tobacco rod conveyor or the tobacco rod shaping mechanism is in operation, the sequence of events not overlapping.

5

Concerning the tobacco rod conveyor, reference is now made to Figs. 4A to 4D and Fig. 5, to explain the details. The tobacco rod conveyor 100 is shown in detail in Fig. 5. It consists of an outer tube 130 and a guide rod 140 axially shiftable in this outer tube 130. Fitted to the front face of the guide rod 140 is the toothed blade 150, the teeth of which are inclined forward to permit advancing the tobacco rod forward while permitting a relatively simple slide out from an inserted plug of tobacco.

10

The guide rod 140 is pre-tensioned by means of a spring 132 in the outer tube 130 so that the guide rod and outer tube are loosely nested. The guide rod 140 can be withdrawn from the rear of the outer tube 130, i.e. to the left as shown in Fig. 5, in overcoming the spring force.

15

Likewise evident from Fig. 5 is the tobacco chamber 270 in which the toothed blade 150 is located as well as the upper format 320 and lower format 342, a tube 40 being formed therebetween.

The back and forth movement of the tobacco rod conveyor 100 is provided by an eccentric drive with an eccentric cam 120 and a lever 110 fixedly mounted at its lower end and clasping at its upper end a rear appendage 142 of the guide rod 140 by means of a mounting fixture. Upon rotation of the eccentric cam 120, the tobacco rod conveyor (tappet) 100 is driven back and forth via link guides.

20

Also evident from Fig. 5 is the retaining lever 160, which ensures by means of a latching protuberance 162 that after the tobacco plug has been introduced into the tube in the format 320, 342, the outer tube 130 initially remains in its position during the return movement of the guide

25

rod 140. For this purpose, the latching appendage 142 hooks into the left end of the outer tube 130 so that, upon return of the guide rod at the appendage 142, the toothed blade 150 first travels into the outer tube until the lever 110 rides by an inner edge 112, over the lever projection 164. This releases the latch of the retaining lever 160 with the outer tube 130. Due to the spring force, the outer tube is then able to snap back into the position shown in Fig. 5. The indicated spring 166 ensures that the latched condition of the retaining lever 160 is maintained until it is released by the lever projection 164 riding along the edge 112.

How the above described sequence occurs in detail is again illustrated in Figs. 4A to 4D. It is to be noted that the Figs. 4A to 4D are merely schematic illustrations, i.e. the shapes of the components do not exactly match the real shapes. Thus, the cavity 270 can be compared to the closed tobacco chamber, if one imagines that the part 250 is shiftingly mounted. The recess 342 can be compared to the lower format of the pusher 340.

In Fig. 4A there is illustrated the condition in which tobacco has been pressed into the tobacco chamber 270, the toothed blade 150 already being located in the tobacco chamber 270, as also illustrated in Fig. 5. Of the tappet 100, the outer tube 130 and the rear appendage 142 of the guide rod 140 (not shown) are evident.

The tobacco plug is then urged into the tube and the condition subsequent to this action is shown in Fig. 4B. For this purpose, the outer tube 130 is advanced together with the toothed blade 150 until the front face end of the outer tube 130 locates at the transition between tobacco chamber and tube format. The tappet then remains in this position for some time so that the tobacco is able to expand in the tube and exert sufficient friction on the inner part of the tube.

At the end of this time period, the guide rod 140 is then withdrawn from the outer tube 130 to the rear until the toothed blade 150 totally disappears in the outer tube 130. Since the front face of the outer tube is still urged against the tip of the cigarette, no tobacco is able to drop out of the

cigarette. On retraction of the guide rod 140, the outer tube 130 latches in position by means of the retaining lever 160, as shown already in Fig. 5.

After this, the outer tube 130 reverts back, as urged by the spring 132, to the appendage 142, resulting in the condition shown in Fig. 4D, in which the tobacco chamber 270 can be refilled.

Figs. 6A to 6E illustrate the operating sequence in detail of the tube or cigarette conveyor 30. Shown in Fig. 6A is the condition before a tube 40 is fed to the filling procedure. At its upper side, the pusher 340 comprises a longitudinal recess serving as the lower format 342. When the pusher 340 is fully retracted, it is located at the lowest point of the tube hopper 310 and receives an empty tube in the lower format 342. Fig. 6B then shows the condition in which this tube 40 is raised, i.e. beyond the condition as shown in Fig. 6C into the condition as shown in Fig. 6D, where the lower format 342 and upper format 320 hold the cigarette tube in position so that the tobacco plug can be introduced therein.

To be seen from Fig. 6C is part of a clip 334 of a deflector in contact with the tube 40, the functional and configuration of which will be explained in more detail later.

After the cigarette has been filled with the tobacco plug, the pusher 340 is returned downwards and the cigarette is conveyed in the condition shown in Fig. 6E into the cigarette hopper 330.

The condition shown in Fig. 6E is also shown in Fig. 7, but magnified, the deflector now being clearly evident from the magnified detail as shown on the right. It consists of the clip 334 which is fitted to the upper edge of the wall 332, seated on the common longitudinal centerline 336 and pre-tensioned by means of a lever weight in the direction of rotation. The clips may be lowered into the slots 344 in the pusher 340. They are rotatively mounted and can thus, on upwards travel of the tube 40 in initially being located above this tube 40, ride past it and into the slots 344. They are then in the condition shown in Fig. 7, namely on return downwards travel of the pusher

340 below the tube 40 so that the tube is able to drop by the slanting upper side into the cigarette hopper 330.

Upon upwards travel of the tube (see Fig. 6B), the front ends of the deflectors 334 also serve as
5 deflectors for possible further cigarette tubes included in the raising to thus ensure that only one, single tube is raised to the upper format 320. In this arrangement, a clip, in its middle portion, lies preferably on the filter of the tube to avoid any deformations.

Represented in Fig. 8 is now a further component assembly, namely a tube-aligning device
10 which may be included in the do-it-yourself cigarette maker to straighten very deformed tubes. The tube-aligning device consists of a receiving sleeve 410, a receiving mandrel 420, collets 430, a male thread 460, applied to the front end of the receiving sleeve 410, and a clamping screw 440 which can be screwed in place by means of a clamping lever 470 and a ball 480. Provided at the inner end of the collets is an O-ring.

15 An adapter ring may be provided surrounding the O-ring 450 to center the O-ring 450 and thus to facilitate insertion of the tubes.

A tube is inserted in the open condition of the clamping screw 440, and thus of the collets 430,
20 from the right via the mandrel into the circular gap between receiving sleeve 410 and receiving mandrel 420. Afterwards, the clamping screw is slightly tightened on the thread 460 by means of the clamping lever 470 so that the gap between the collets 430 and the mandrel 420 is narrowed.

25 Already by pushing the tube onto the receiving mandrel, the round shape of the cigarette tube is substantially obtained again. When the collets are then constricted, the tube is lightly clamped in place and can be retrieved from the tube-aligning device by a light pulling force, resulting in the straightened condition of the tube being fixed. In this form, the tube-aligning device is relatively small and can be installed as a stand-alone component assembly in a do-it-yourself cigarette



maker as previously described so that even very deformed tubes can be prepared for the do-it-yourself cigarette maker. The tube-aligning device is very simple and speedy to operate.

With the do-it-yourself cigarette maker and the component assemblies advantageously
5 configured in accordance with the invention, a large number of high-quality cigarettes can be produced in a relatively short period of time with very little manual effort. In addition, due to the plucking roller being removable and since, after removing the tappet, a through hole materializes through the tobacco chamber, the do-it-yourself cigarette maker in accordance with the invention is easy to clean and to service.

10 In the foregoing description, preferred embodiments of the invention have been presented for the purpose of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise form disclosed. Obvious modifications or variations are possible in light of the above teachings. The embodiments were chosen and described to provide the best
15 illustration of the principals of the invention and its practical application, and to enable one of ordinary skill in the art to utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. All such modifications and variations are within the scope of the invention as determined by the appended claims when interpreted in accordance with the breadth they are fairly, legally, and equitably entitled.

WHAT IS CLAIMED IS:

1. A tube or cigarette conveyor for a do-it-yourself cigarette maker comprising:

- a tube hopper for receiving a supply of empty cigarette tubes,
- 5 - a discharge device for a tube, which is to be filled with a tobacco material,
- a holder means for holding said tube during the filling operation, and
- a cigarette hopper for receiving the filled cigarettes, said discharge device being a lifting device which raises a tube from below out of said tube hopper, wherein said lifting device comprises a pusher, the top edge of
- 10 which has a longitudinal recess.

2. The tube or cigarette conveyor as set forth in claim 1, wherein said pusher in said tube hopper is arranged so that said longitudinal recess, in the lowered condition, forms part of the bottom at the lowest point of said tube hopper.

3. The tube or cigarette conveyor as set forth in claim 1 or 2, wherein said pusher is arranged at a straight wall of said tube hopper, along which it is raised, deflectors being arranged at the upper part of said wall, which are capable of returning all raised tubes back into said tube hopper, except for the one located in said recess of said pusher.

4. The tube or cigarette conveyor as set forth in claim 3, wherein said deflectors comprise at least one, but preferably two, pivot clips oriented transversely to said longitudinal recess of said pusher and initially coming to rest on said raised tube upon raising of said pusher, while, upon a further raising, they slide past said tube into slots in said pusher so that they are located underneath said tube and transport said filled cigarette into said cigarette hopper upon lowering of said pusher.

5. The tube or cigarette conveyor as set forth in claim 4, wherein said clips are arranged on a common pivoting axis and are pre-tensioned by means of a lever weight in the direction of rotation so that, upon raising of said tube, their middle sections initially lightly press on said tube, while their front sections deflect further tubes.

6. The tube or cigarette conveyor as set forth in any of the claims 1 to 5, wherein said means for holding said tube during said filling procedure comprises a recessed surround which surrounds the tube or cigarette from above at least in part.

5

7. The tube or cigarette conveyor as set forth in claim 6, wherein said longitudinal recess of said pusher, in the raised condition, together with said recessed surround of said holder means, substantially completely surrounds said tube during said filling procedure.

10 8. The tube or cigarette conveyor as set forth in claim 6 or 7, wherein said holder means comprises sensors, in particular a photocell, which detects the presence of a tube or cigarette or the empty condition of said holder means.

15 9. The tube or cigarette conveyor as set forth in any of the claims 1 to 8, wherein said tube hopper and/or said cigarette hopper are configured as drawers, in particular at least the bottom of which is configured latticed, and preferably a removable catchment vessel for the tobacco material is provided below said tube hopper and/or said cigarette hopper.

20 10. A tobacco rod shaping means, in particular for a do-it-yourself cigarette maker, comprising:

- a funnel-shaped tobacco material infeed section,
- a singling device for said tobacco material, and
- a tobacco rod compression means, said singling means being a roller, partly

25 surrounded by a housing, with plucking means arranged at the circumference of said roller, in particular a plucking roller with plucking pins, by means of which said tobacco material is conveyed into said tobacco rod compression means, wherein a wall section is pivot-mounted so that it can be pivoted out of the way of said roller from a secured working position in order to remove excess tobacco

30 downwards, where it can preferably drop into a removable catchment means.

11. The tobacco rod shaping means as set forth in claim 10, wherein said funnel-shaped infeed surface comprises at least one wall section oriented radially to said roller axis.

5 12. The tobacco rod shaping means as set forth in claim 10 or 11, wherein said tobacco rod compression means comprises a tobacco chamber, which can be opened up and closed by at least one side, the travelling side part of said chamber preferably being shifted by means of a cam from the opened position into the closed position, in overcoming a spring preload, and the opening width of the chamber is preferably settable
10 by means of a positioner.

13. The tobacco rod shaping means as set forth in any of the claims 10 to 12, wherein said wall sections, surrounding said tobacco rod to be shaped, are provided with an anti-stick coating

15 14. The tobacco rod shaping means as set forth in any of the claims 10 to 13, wherein said roller is inserted removable.

20 15. The tobacco rod shaping means as set forth in any of the claims 10 to 14, wherein said plucking roller is made of a material resistant to corrosion, for example aluminum, preferably with an AlO_2 surface finish.

25 16. A tobacco rod conveyor for a do-it-yourself cigarette maker comprising a tappet, for shuttling in and out of a chamber containing a tobacco plug, wherein said tappet comprises an outer tube, in which a guide rod runs, said guide rod comprising at its front end an insertion aid for said tobacco rod.

30 17. The tobacco rod conveyor as set forth in claim 16, wherein said guide rod comprises at its rear end an appendage, by which it can be withdrawn in overcoming the pressure of a spring provided in said outer tube, said insertion aid for said tobacco material thereby entering said outer tube.

18. The tobacco rod conveyor as set forth in claim 16 or 17, wherein said insertion aid has substantially the length of said tobacco rod and is shaped so as to assist pushing of said tobacco rod only in the conveying direction, and is configured, for example, as a toothed blade, a shingled scoop or spiral guide.

5

19. The tobacco rod conveyor as set forth in claim 16 to 18, wherein said tappet is shifted back and forth at its rear end by means of an eccentric drive, preferably a support engaging with said eccentric drive, in particular a retaining lever, holds said outer tube in position upon removal of said guide rod after conveyance of said tobacco rod.

10

20. A tube aligning device, especially as provided for a do-it-yourself cigarette maker, comprising a receiving element for said tube consisting of a circular gap between a housing and a mandrel secured in said housing, wherein said circular gap comprises substantially the axial length of a cigarette tube and at the insertion end a device is provided with which said circular gap can be constricted.

15

21. The tube aligning device as set forth in claim 20, wherein said constricting device comprises a clamping screw, for screwing to said insertion end, as well as collets, arranged between mandrel and housing, said gap between said collets and said mandrel being constricted by turning said clamping screw.

20

22. The tube aligning device as set forth in claim 19 or 20, wherein, in the region of said collets, an O-ring may be provided around said mandrel, at which preferably an adapter ring is arranged for fixing and centering.

25

23. A do-it-yourself cigarette maker comprising one or more of the following component assemblies:

- a tube or cigarette conveyor as set forth in claims 1 to 9;
- a tobacco rod shaping means as set forth in claims 10 to 15;
- a tobacco rod conveyor as set forth in claims 16 to 19;
- a tube aligning device as set forth in claims 20 to 22.

30

24. The do-it-yourself cigarette maker as set forth in claim 23, wherein it furthermore comprises motors, more particularly electric motors for said components to be driven, as well as a preferably electronic sequence control which, with the aid of sensors, monitors and regulates the operating condition in each case and in particular provides an external indication thereof by display means.

25. The do-it-yourself cigarette maker as set forth in claim 23 or 24, wherein said tappet of said tobacco conveyor, said tobacco compression chamber of said tobacco rod shaping means, and said tube holding means, for holding said tube during said filling procedure, are all arranged in line, these components being configured so that, upon removal of said tappet, a through hole exists in this line.

ABSTRACT OF THE DISCLOSURE

The invention relates to a do-it-yourself cigarette maker and its component assemblies, such as, a conveying device for cigarettes or tubes fitted with a lifting device, a device for shaping a tobacco rod fitted with a plucking roller, a tobacco rod conveyor fitted with a spring tappet, and a tube-aligning device with a narrowable slit for introducing the tube.

10

15

20

25

Fig. 1

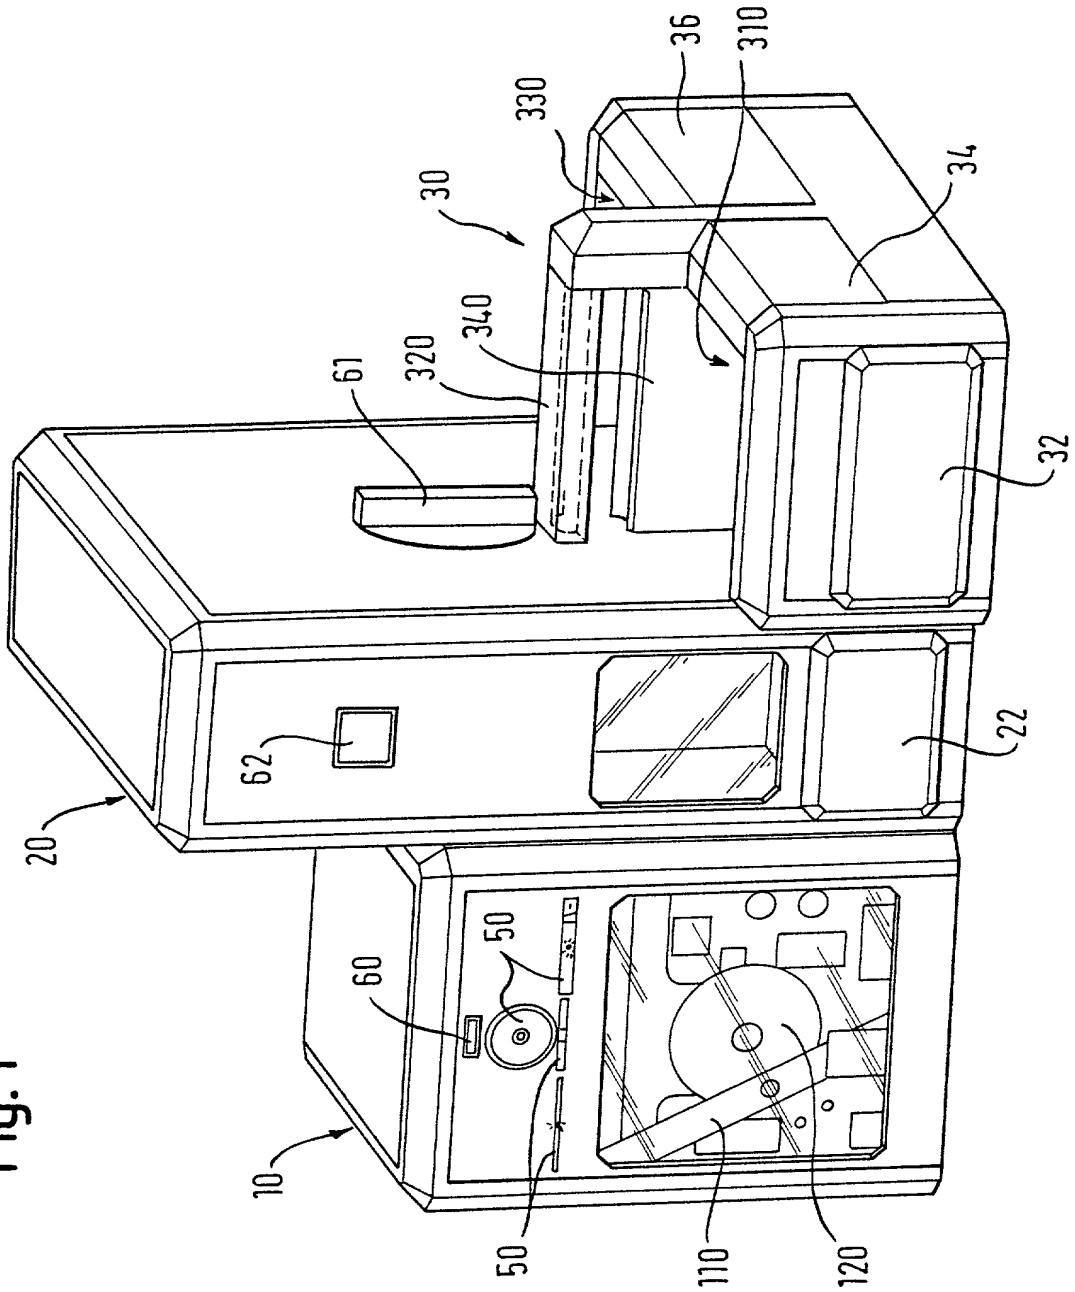


Fig. 2

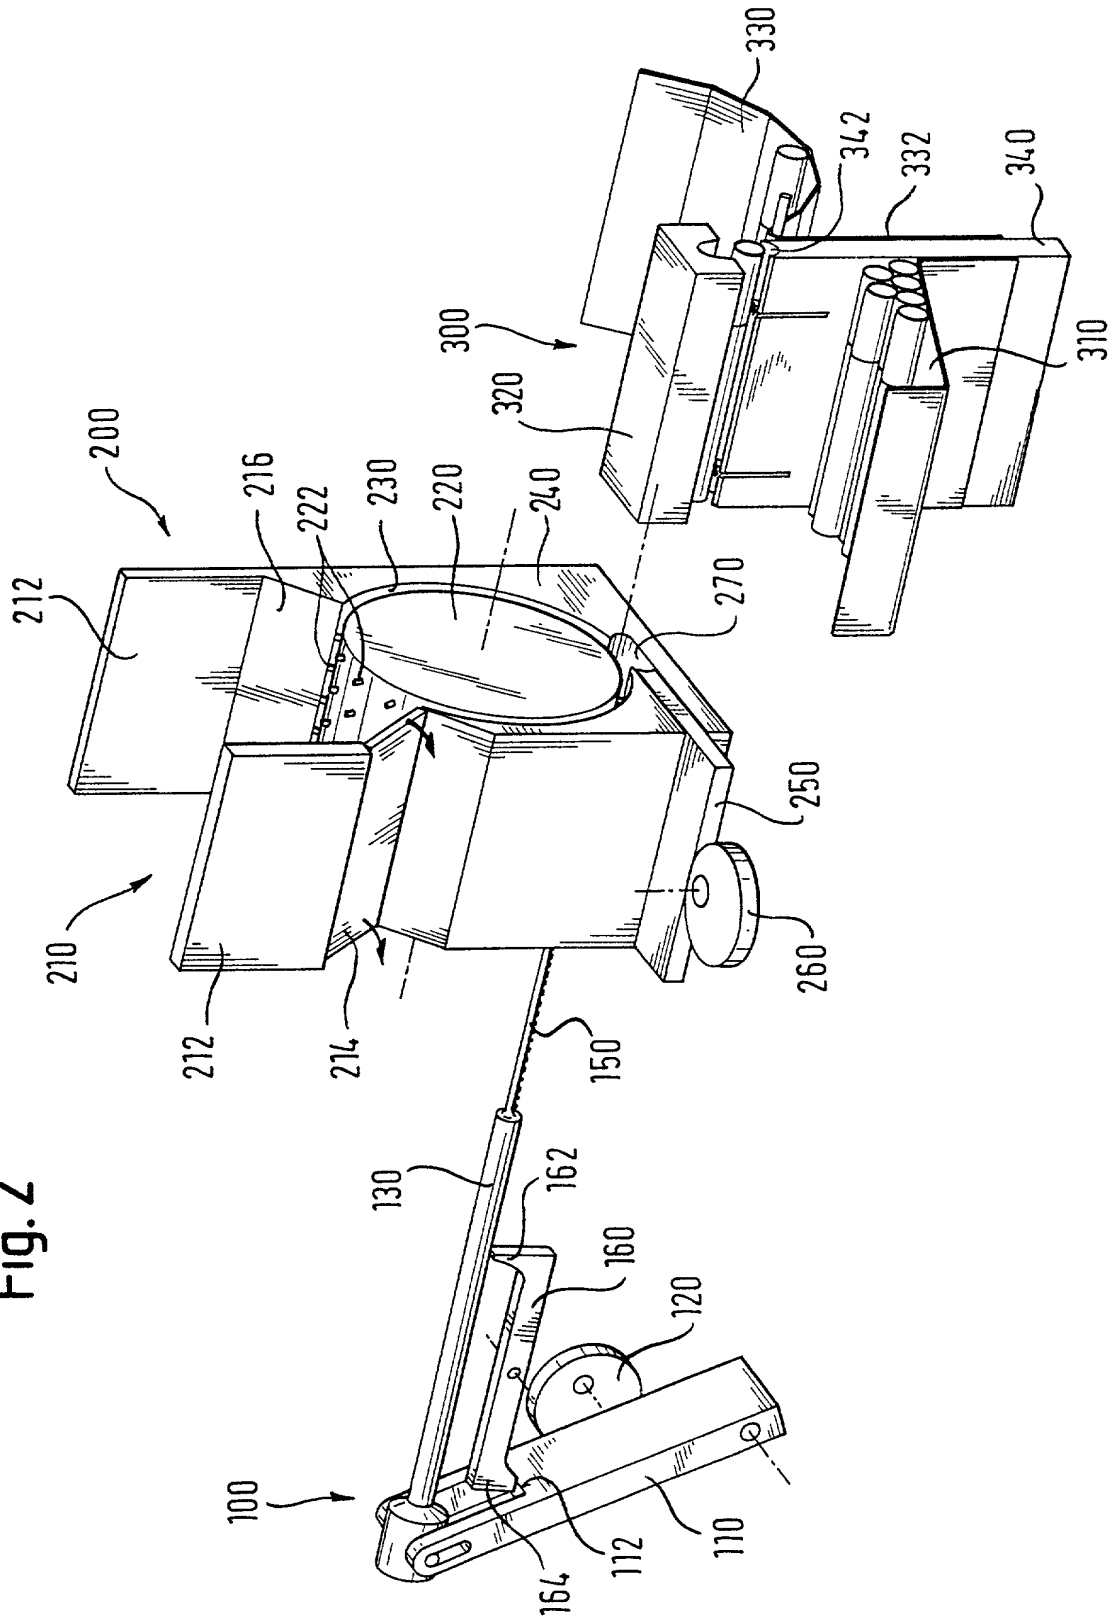


Fig. 3

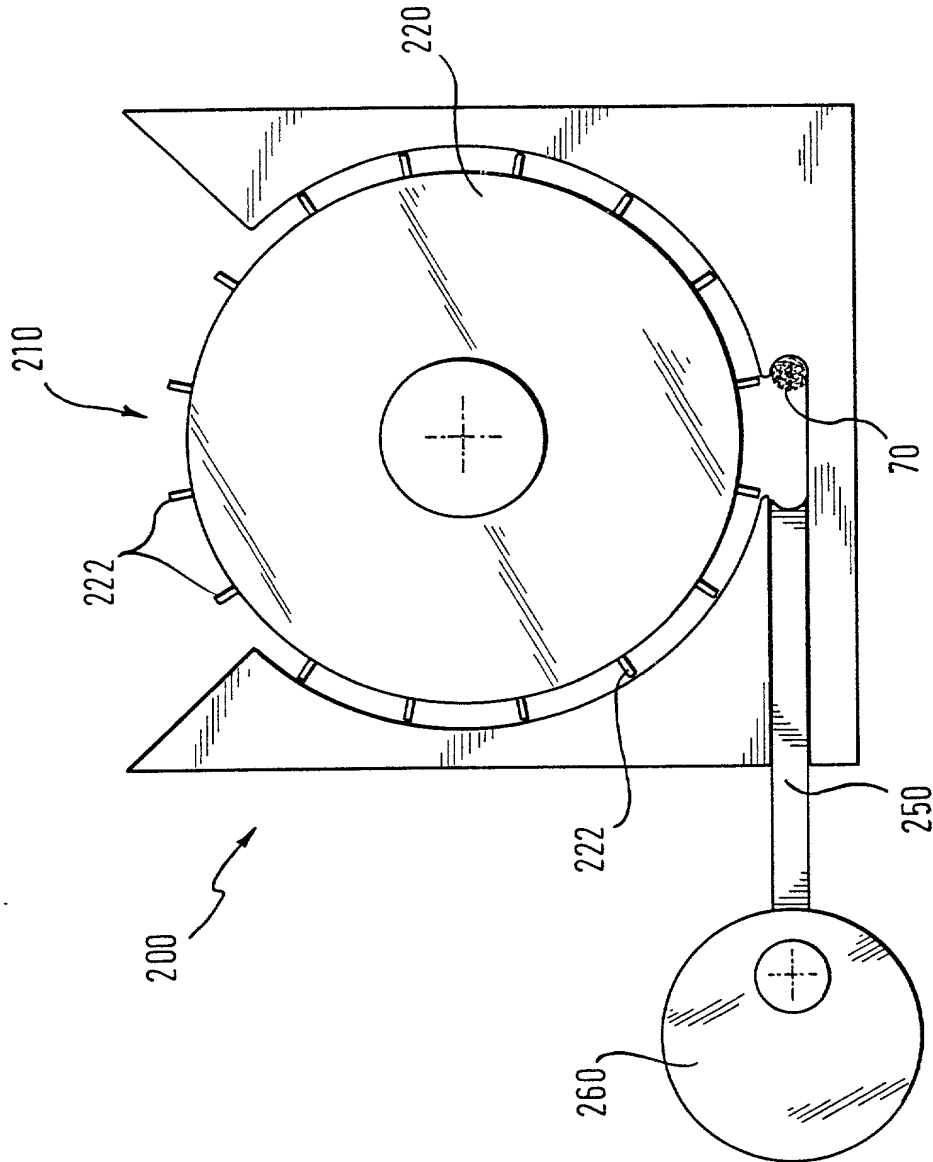


Fig. 4D

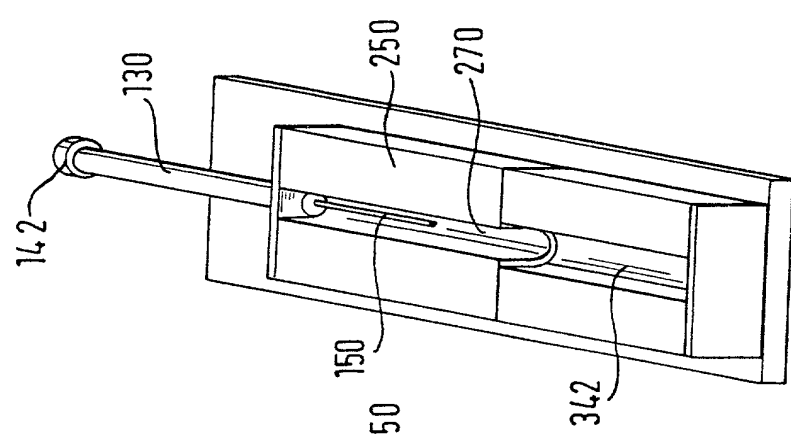


Fig. 4C

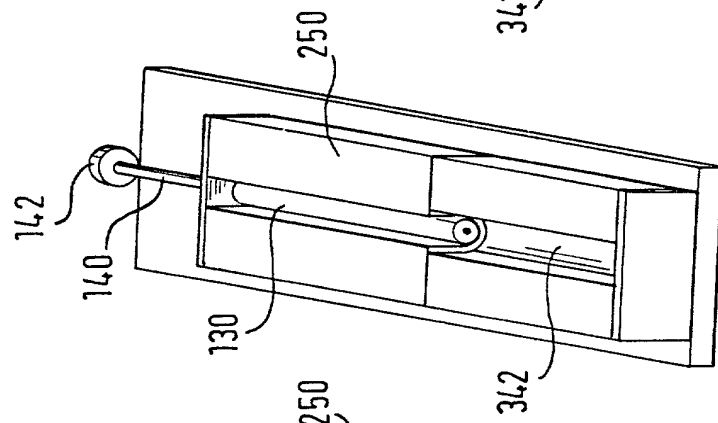


Fig. 4B

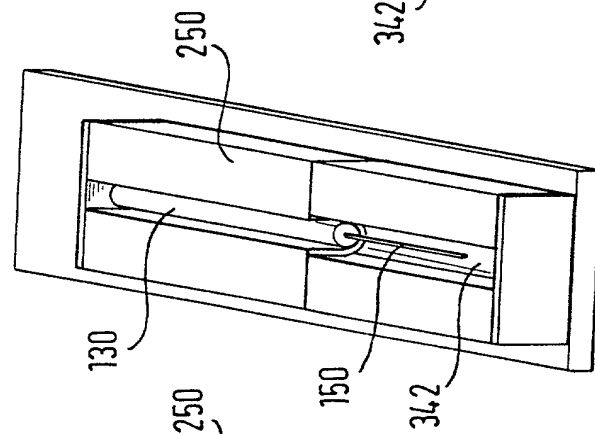


Fig. 4A

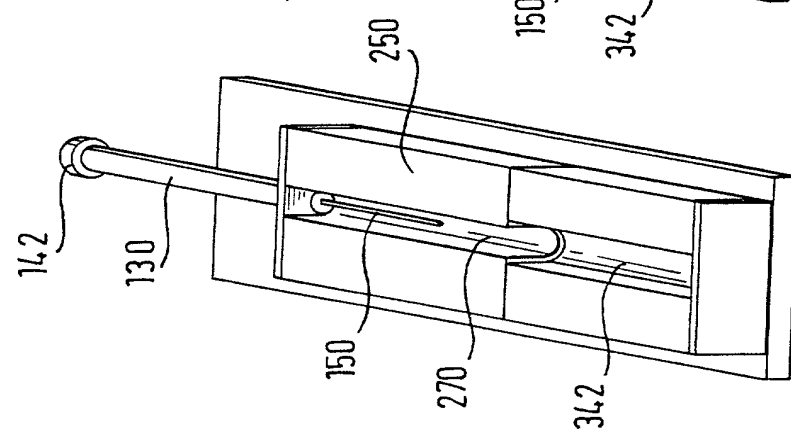


Fig. 5

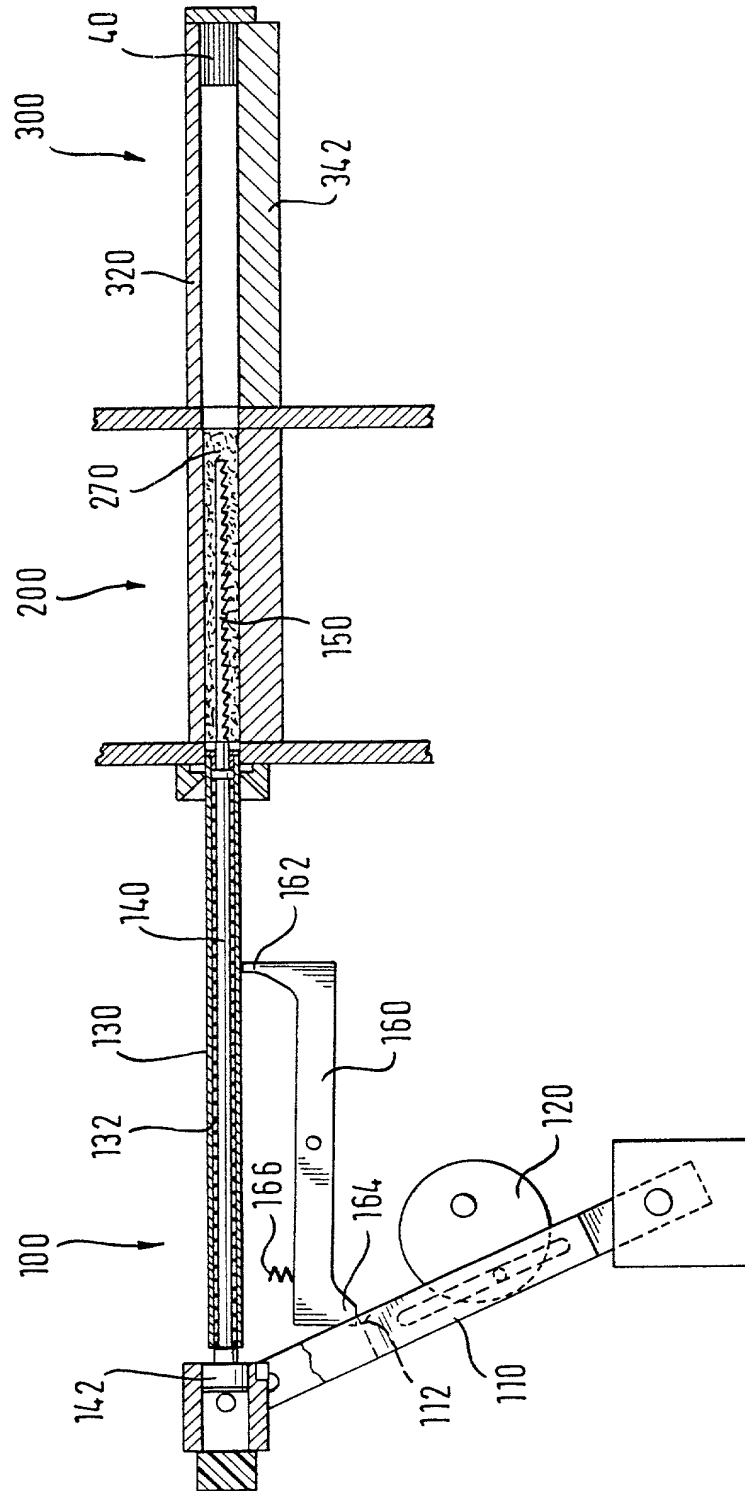


Fig. 6A

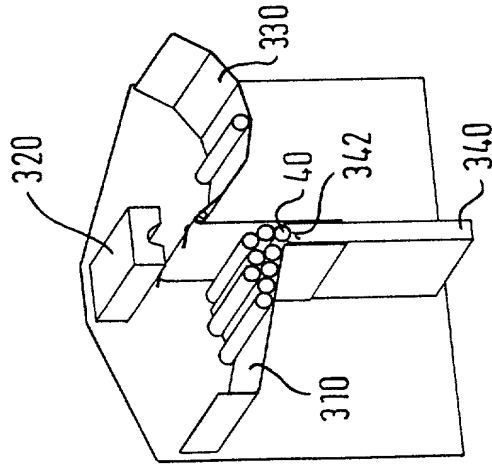


Fig. 6B

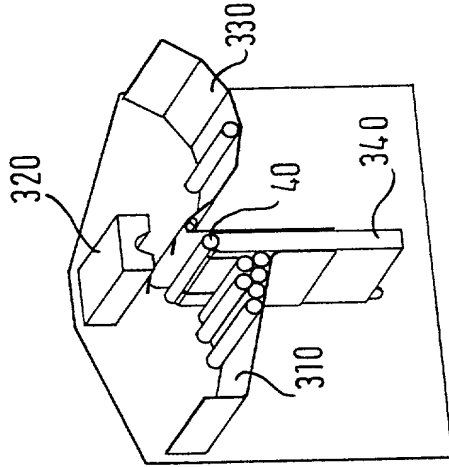


Fig. 6C

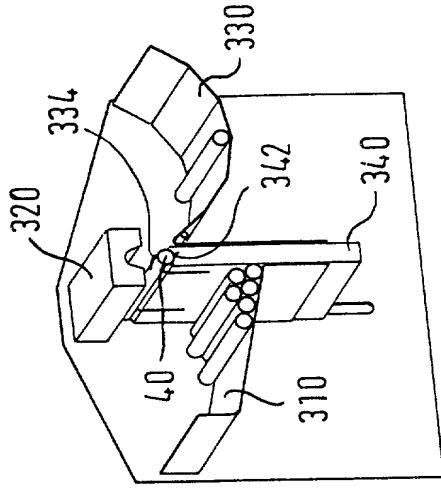


Fig. 6D

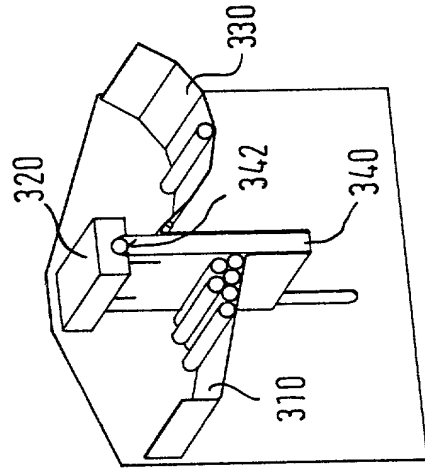


Fig. 6E

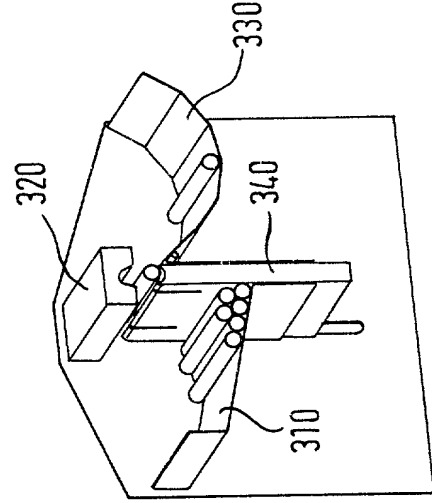


Fig. 7


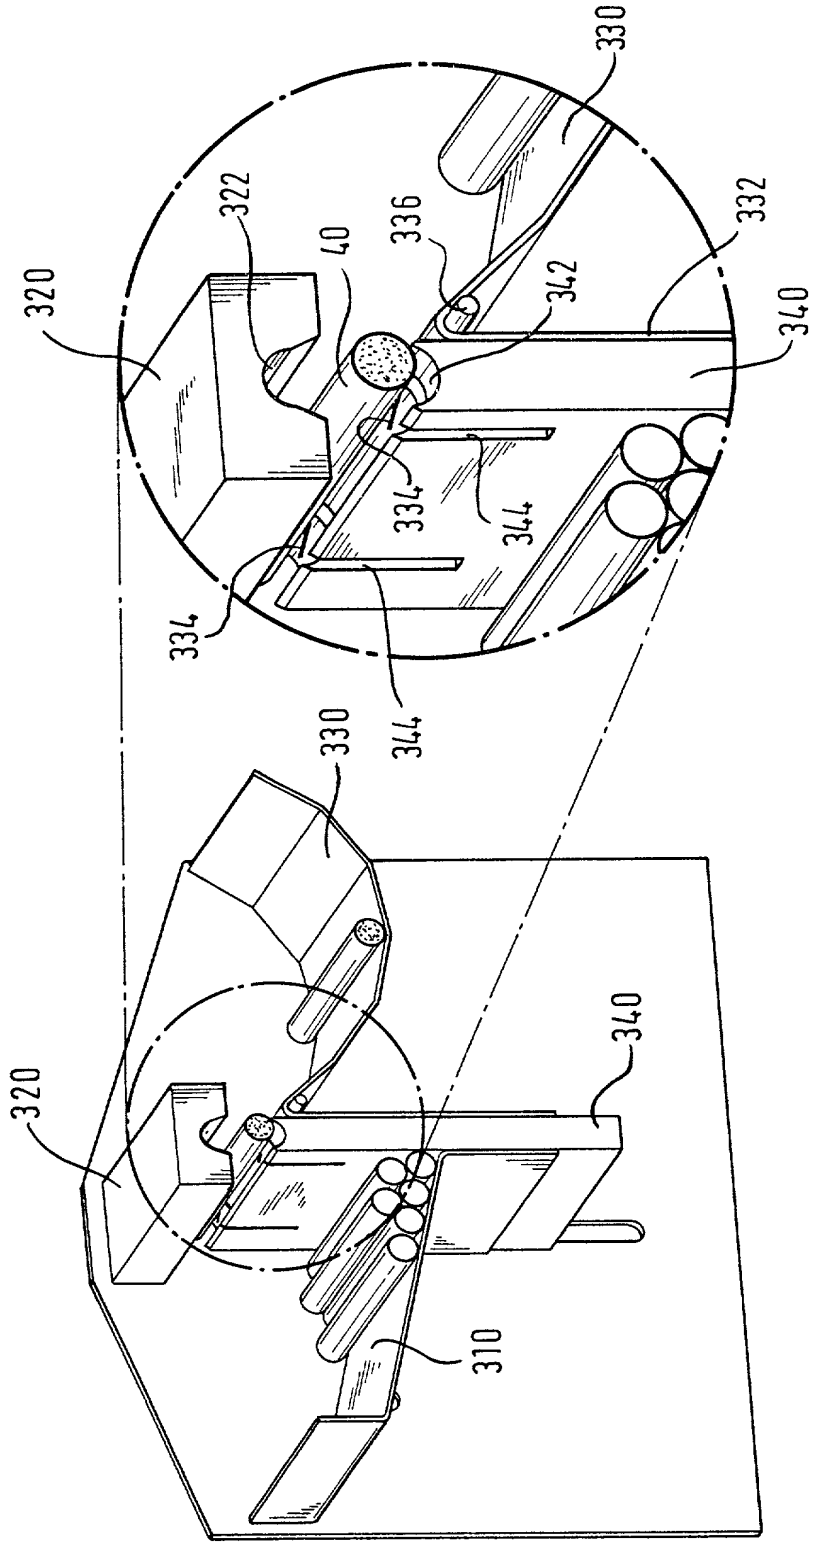


Fig. 8

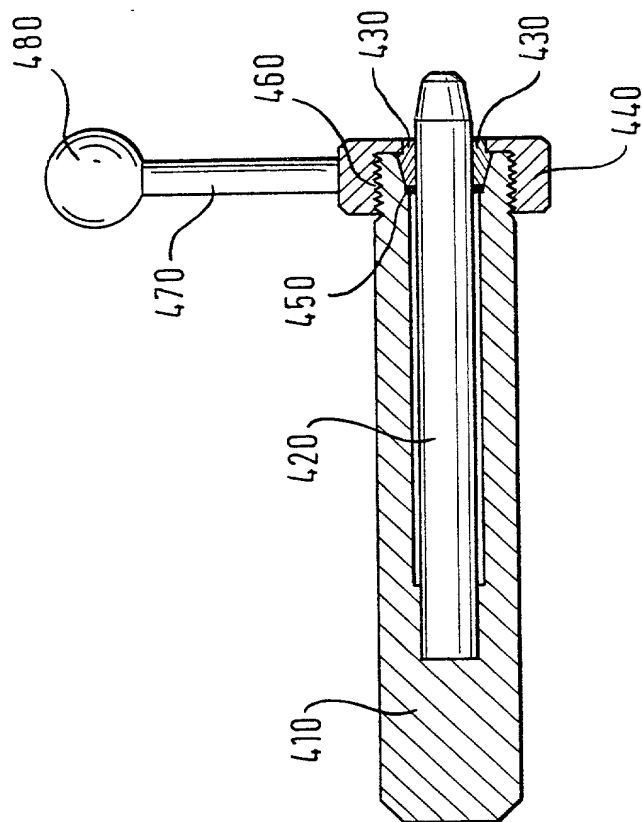

DECLARATION UNDER 37 C.F.R. 1.63 AND APPOINTMENT OF POWER OF ATTORNEY

As a below-named inventor, I hereby declare the following:

- My residence, post office address and citizenship are as stated below, next to my name.
- I believe that I am an original, first and sole or joint inventor (if more than one inventor is listed below) of the subject matter which is claimed and for which a patent is sought on an invention entitled, **A DO-IT-YOURSELF CIGARETTE MAKER AND COMPONENT ASSEMBLIES**, the specification of which: (check one)



is attached hereto.

was filed on _____

as Application Serial No. _____

and was amended on _____

- I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred-to above.
- I acknowledge my duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.
- I hereby claim foreign priority benefits under Title 35, U.S.C. Sections 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>			<u>Priority Claimed</u>	
<u>198 12 644.1</u>	<u>Germany</u>	<u>23 March 1998</u>	<u>X</u>	<u> </u>
(Number)	(Country)	Filing Date (Day/Month/Year)	(Yes)	(No)
_____	_____	_____	_____	_____

- I hereby claim domestic priority benefits under 35 USC §119(e) of any United States provisional Application(s) listed below:

Application Number

Filing Date

- I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application

in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or other PCT international filing date of this application:

<u>U.S. Parent Application or PCT Parent Number</u>	<u>Parent Filing Date</u> Filing Date (Day/Month/Year)	<u>Parent Patent Number</u> (if applicable)
PCT/EP99/01768	17 March 1999	

- I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, Section 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


- I hereby appoint James R. Higgins, Jr., Reg. No. 29,264, Charles G. Lamb, Reg. No. 24,783, John F. Salazar, Reg. No. 39,353, Jeffrey A. Haeberlin, Reg. No. 40,630 and Thomas B. McGurk, Reg. No. 44,920 as my attorneys, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith, and I request that all communications concerning this application be addressed to

John F. Salazar
Middleton and Reutlinger, P.S.C.
2500 Brown & Williamson Tower
Louisville, Kentucky 40202
telephone (502) 584-1135, fax (502) 561-0442
EMAIL: JSALAZAR@MIDDREUT.COM

100
Full name of first inventor: Wolfgang Trinkies
Inventor=s Signature: [Signature] Date: 08.29.2000
Residence: Birkig 26, 95497 Goldkronach, Germany DEX
Citizenship: German
P.O. Address: Birkig 26, 95497 Goldkronach, Germany

200
Full name of joint inventor: Kurt Burghart
Inventor=s Signature: [Signature] Date: 09.31.2000
Residence: Hummelstieg 21, 22880 Wedel, Germany DEX
Citizenship: German
P.O. Address: Hummelstieg 21, 22880 Wedel, Germany

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

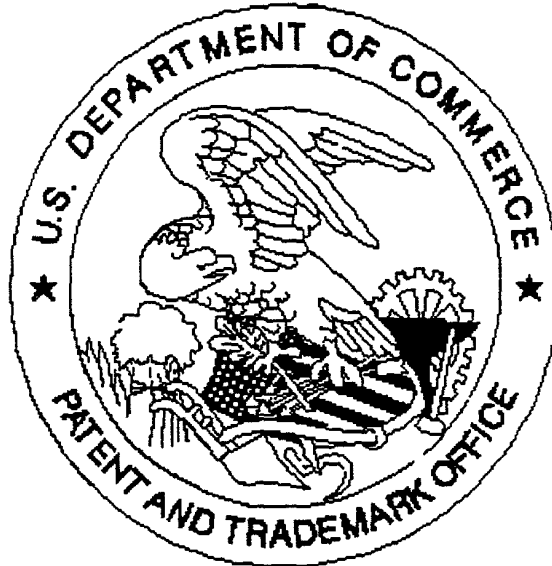

Application deficiencies found during scanning:

☒ Page(s) 2 of Specification were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ *Scanned copy is best available.*

SCANNED # 2